LA SEMAFORICA

SENTRY BOX ROMA

per Vigili Urbani

SENTRY BOX MOD. ROMA

CARATTERISTICHE GENERALI

Sentry box especially designed for meeting specific requirements of historical areas and city centers, built with strict safety standards and strong materials.

- Structure realized with steel tubular tyre mm 60×60 3 mm thick
- External wall and internal panels in galvanized sheet steel 3 mm thick
- Thermic insulation of walls and roof with styrofoam material, thickness of 30 mm
- Entry swing door with external opening and cylindrical lock
- Entry stairs with two steps in antislip aluminium sheet mm 3+2
- Sound and shatter-proof window glasses Blindovis 18/19
- One lateral sliding window that can be opened, mounted on bearings
- Movable floor realized with antislip aluminium staves mm 3+2 mounted on stainless steel drop slide
- 4-pitch roof in galvanizes sheets and ceiling 2 mm thick, with one brass ornamental cone
- Writing desk with wood shelf
- Movable seat, coat hook
- Electric panel in compliance to CEI normative, current overload protection switch, socket, light switch and disconnecting switch for air conditioner (where provided), no. 4 halogen spotlight inserted in the ceiling
- Epoxy powder painting, any colour on demand

Dimensions:

- Base cm 230×250
- Roof cm 240×240
- Room cm 200x200x204 H
- Total height cm 304, ornamental cone included
- Total weight average Kg 1.400
- Possibility of loading and unload with a lift truck or auto crane after having disassembled the roof
- All the components of the sentry box are interchangeable.

On request, the sentry box can be supplied with internal dimensions cm 150x150x204 H.

MOD. ROMA

In order to offer the best possible service, La Semaforica reserves the right to modify at any moment and without any warning the features of the products described in this document. This document has the only purpose of illustrating the products. If you need detailed technical data, please do not hesitate to contact us.

AIR-CONDITIONER/GAR

Heat pump air conditioner without outdoor unit block positioned on the wall.

- Air ventilation
- Air condenser through two holes communicating with the outside
- Dehumidification through dry function
- Ventilation function
- Temperature sensor on the remote
- Programmable digital timer
- washable air filters
- Ecologic refrigerant R410A (HFC)
- Power supply 230V. 50Hz
- Power consumption in a climate KW 0.900

Dimensions height mm735, largness 839 mm, depth 260 mm

(The manufacturer reserves the right to modify any product characteristic without prior notice)

AIR-CONDITIONER/GAR

STANDARD EQUIPMENT

- Air conditioning heat pump
- First Aid Box
- Fire extinguisher powder from 2 kg
- Stick bright multifunction
- Seat with chrome legs

OPTIONAL EQUIPMENT

- Intercom / Telephone
- Drawer paper shuffler
- Ceiling lamp with fluorescent lamp and a protective grid on all four sides of the roof for the outdoor lighting
- Self-powered emergency lights

First aid kit, multi-function luminous baton, fire extinguisher

Internal ceiling recessed spotlights

Document pass-through drawer and internal intercom system

DIMENSIONAL DRAWINGS

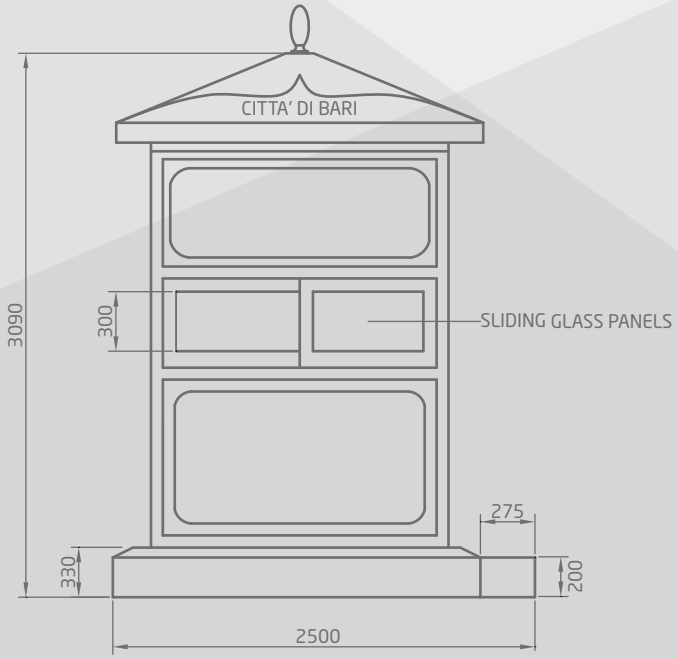

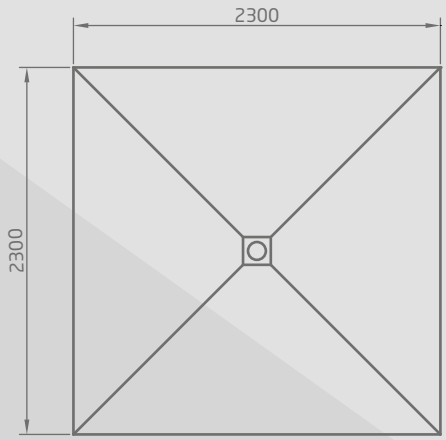

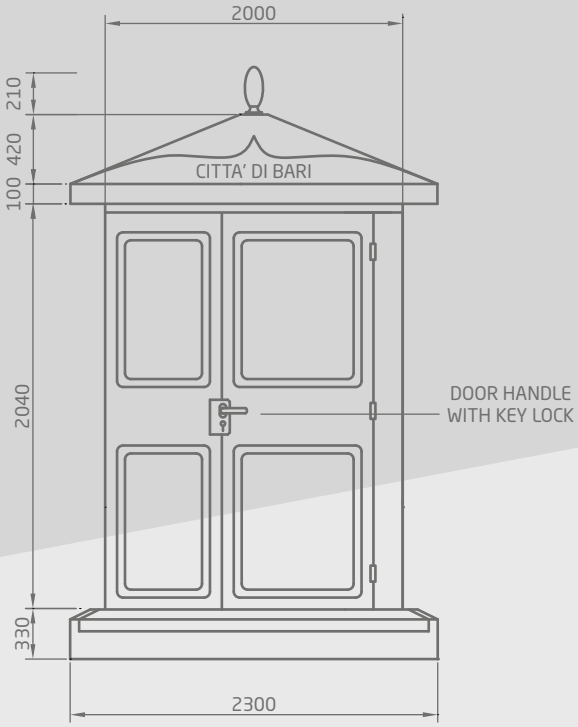

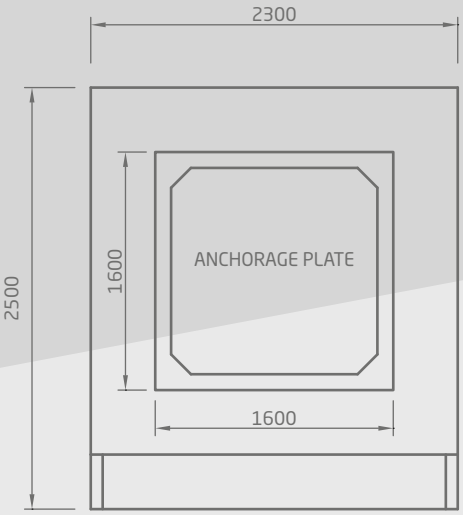

PLATFORM
FOOTPRINT

All dimensions in mm

LA SEMAFORICA

Via Ponticello, 17 - 35129 Padova (PD) - ITALY

+39 049 773055 +39 049 8074002

www.lasemaforica.com info@lasemaforica.com